

# AIRSTROKE<sup>®</sup>

ACTUATORS

# AIRMOUNT<sup>®</sup>

ISOLATORS



## DR SERIES

# Firestone

World's Number 1  
Air Spring.



FIRESTONE INDUSTRIAL PRODUCTS COMPANY

DRS\_A4\_703

## Advantages

Low cost	Durable for long life	Unsurpassed isolation capability	Versatile
No maintenance	No lubrication	Constant isolation efficiency	Noise reduction
Friction free	Flexible media	Accurate height control	Wide size range
Angular capability	Side loading capability	Extended equipment life	Compact installed height

## DR Series Selection Guide


### Airstroke™ Actuators

### Airmount™ Isolators


### End Closures

Style Number	Max. Dia. at 7 BAR (mm)	Min. Height (mm)	Max. Stroke (mm)	5 BAR Force at Stroke of			Design Height (mm)	Load at Design Height @ 5 BAR (kN)	Natural Frequency @ 5 BAR (Hz)	% of Isolation at Forced Frequency			Bead Plate Type	Blind Nut or Bolt Circle Dia. (mm)	Number of Bolts
				25 mm (kN)	50% of Max. Stroke	Maximum Stroke (kN)				7 Hz	13 Hz	25 Hz			
<b>SINGLE CONVOLUTED</b>															
4-1/2 x 1	120	50	40	2.5	2.9	1.0	65	3.3	4.8	-	84.4%	96.2%	6	93	3
6 x 1	162	50	50	5.9	5.9	4.1	80	5.5	3.7	-	91.2%	97.8%	7	127	4
8 x 1	215	50	75	11.3	10.3	3.9	89	9.8	3.4	-	92.7%	98.1%	7	158	4
10 x 1	265	50	85	15.7	13.7	7.8	92	14.5	2.9	79.3%	94.8%	98.6%	7	181	4
12 x 1	312	55	95	27.5	22.6	3.9	95	25.5	3.0	77.5%	94.4%	98.5%	7	232	4
14-1/2 x 2	378	50	115	45.1	37.3	12.3	110	37.5	3.0	77.5%	94.4%	98.5%	7	283	4
16 x 2	406	60	140	45.1	33.3	14.2	130	34.9	2.6	84.0%	95.8%	98.9%	7	283	4
<b>DOUBLE CONVOLUTED</b>															
4-1/2 X 2	120	70	75	3.9	3.2	1.5	100	3.4	3.4	-	92.7%	98.1%	6	93	3
6 X 2	162	75	115	8.3	6.4	1.5	130	6.5	2.9	79.3%	94.8%	98.6%	7	127	4
8 X 2	215	75	150	12.3	10.3	3.9	160	10.0	2.5	85.4%	96.2%	99.0%	7	156	4
10 X 2	265	75	200	19.8	13.7	5.9	170	14.7	2.2	89.0%	97.1%	99.2%	7	181	4
12 X 2	312	75	225	29.4	22.6	4.4	170	24.3	2.1	90.1%	97.3%	99.3%	7	232	4
14-1/2 X 2	378	75	260	45.1	36.3	17.7	200	37.0	2.0	91.1%	97.6%	99.4%	7	283	4
16 X 2	406	75	265	63.0	43.1	9.8	200	45.0	1.8	92.9%	98.0%	99.5%	7	283	4
<b>TRIPLE CONVOLUTED</b>															
8 X 3	215	110	240	13.2	9.8	3.9	220	10.6	2.1	90.1%	97.3%	99.3%	7	156	4
10 X 3	265	100	275	20.1	14.2	5.9	250	13.5	1.8	92.9%	98.0%	99.5%	7	181	4
12 X 3	312	100	300	27.9	22.1	8.3	250	23.5	1.6	94.5%	98.5%	99.6%	7	232	4
14-1/2 X 3	378	125	350	46.1	35.3	15.7	285	37.0	1.6	94.5%	98.5%	99.6%	7	283	4
16 X 3	406	100	360	53.4	42.2	13.7	290	41.5	1.1	97.5%	99.3%	99.8%	7	283	4

Type 6

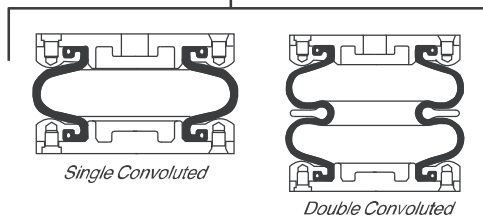

Type 7

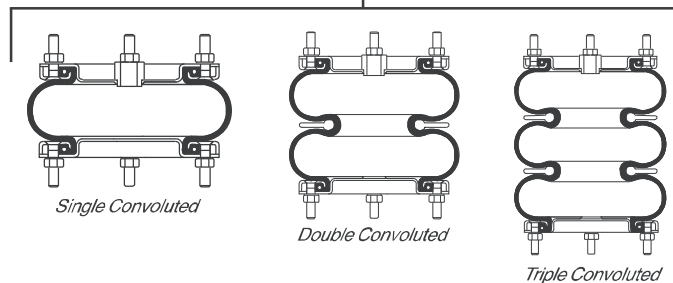


Distributed by:

**Firestone**  
World's Number 1  
Air Spring.


FIRESTONE INDUSTRIAL PRODUCTS COMPANY

800.888.0650 | [www.fsip.com/Industrial](http://www.fsip.com/Industrial)

TYPE 6 BEAD PLATE



TYPE 7 BEAD PLATE



**Please note:** The information contained in this publication is intended to provide a general guide to the characteristics and application of these products. The material, herein, was developed through engineering design and development, testing and actual applications and is believed to be reliable and accurate. Firestone, however, makes no warranty, expressed or implied, of this information. Anyone making use of this data does so at his/her own risk and assumes all liability resulting from such use. Please refer to the full Engineering Manual and Design Guide for more detailed information. It is suggested that competent professional assistance be employed for specific applications.